

Owner's Manual



Xpress0



Software-Version 2.0.0

Owner's Manual



DynaSample

Ingo Scherzinger

Pforzheimer Str. 87
D-75242 Neuhausen
GERMANY

Phone	+49 (700) DYNASAMPLE
Email	info@dynasample.com
Internet	https://.dynasample.com

Owner's Manual Version 2.0 Rev.0
(last update October 2018)

Table of Contents

I.)	License Agreement & Warranty	p. 1
	1) Rights of Use	
	2) Safety Instructions	
	3) Warranty	
II.)	Design and Architecture of the XpressO	p. 3
	1) General Information about Sound Production	
	2) Setting up the Cable Connections	
	3) General Operating Instructions	
	4) Bank (Factory / User)	
	5) Preset	
	6) Store Preset	
	7) User Interface	
III.)	Inputs and Outputs	p. 7
	1) Front	
	2) Remote Control Unit	
	3) Rear	
IV.)	Factory / User Preset Banks	p. 8
	1) Select Bank	
	2) Renaming of User Banks	
	3) Copy and Restore User Banks	
	4) Copy User Banks to an external USB Drive	
V.)	Play	p. 9
	1) General	
	2) Parameter	
VI.)	Edit	p. 11
	1) General	
	2) Parameter	
	3) Store	
	4) Discard Changes	
VII.)	Store	p. 23
VIII.)	Global Settings	p. 24
	1) General	
	2) Enter Global Settings Mode	
	3) Parameter	
IX.)	Demo	p. 31
X.)	Utility	p. 32
XI.)	Special Features	p. 36
	Pitchbend Program and Bank Change for the Akai EWI-USB	
XII.)	Trouble-Shooting	p. 37
XIII.)	MIDI - Implementation	p. 38
XIV.)	Index of Sounds – Factory Banks	p. 39

I.) License Agreement & Warranty

Congratulations on purchasing our MIDI / USB sound module **XpressO!**

We hope you will have much musical enjoyment with this excellent product from DynaSample!

In order to avoid problems or inconveniences that could affect your artistic and musical creativity we kindly ask you to carefully read the following license agreement and safety instructions.

By using the instrument you explicitly accept these terms. In case you do not agree with the following terms please do not play the instrument and contact **DynaSample** immediately.

1) Rights of Use:

The user has the right to use the instrument for private or commercial purposes and perform in public or publish the results of these performances in any way without restrictions.

The license of the sound library is connected to the hardware unit and not to the user. I.e. the user has the right to sell the instrument and the license will stay valid for the instrument with the next owner. Once the license fee for the library has been paid in full it will stay permanently on the instrument. In case of a defect of the hardware the license can be transferred to another unit if the defective unit is returned to DynaSample.

The user does not have the right to copy single notes or instruments as samples either by recording audio or copying sound files from the memory for the use with other software or hardware instruments unless authorized by DynaSample. Violations will be prosecuted by law.

Parts of the software are subject to the GNU GPL license. Please contact DynaSample for further information or get information on the internet about the license of PureData and Truecrypt.

If the user has a time limited license agreement the license will expire after the time specified and he will have to make a payment - as specified at the time of purchase - to renew the license until he has acquired a permanent license. The conditions are subject to change and are valid as of the time of purchase throughout the full time needed to acquire the full license.

Any attempt to manipulate the license will make the license void for this licensing period and the license for this time period will have to be purchased anew. The last specified licence payment will make the license permanent.

2) Safety Instructions:

Only use the included AC adapter. Other power supplies might cause problems or damage the unit.

Do not attempt to use the unit at temperatures lower than 0°C (32°F) or higher than 40°C (105°F) to avoid damage from moisture or overheating.

Protect the unit thoroughly against liquids, humidity or condensation that might occur when experiencing large temperature changes.

The vents on top and on the side of the housing need to be uncovered at all times. Covering them can lead to overheating and will void the warranty.

Always place the unit in a dry place with sufficient air for cooling and avoid placing it directly in the sun. Do not place it next to heating appliances or similar.

Do never open the unit. Opening can impact the functionality and lead to damages. There is also a risk of injuries by touching any of the electrical parts.

Do never manipulate the AC adapter in any way. There is a serious risk of an electrical shock!

Transport the unit carefully and only in its original case to avoid damage.

To avoid damaging the amplifiers and speakers as well as injuring your ears turn on the XpressO first. Then switch on your amplification system and slowly raise the volume without sudden volume jumps that could hurt your or other people's ears.

When finished turn off the amplifier first and then the XpressO.

Self-inflicted errors caused by disregarding the above mentioned safety instructions can lead to the loss of the warranty. Breaking the warranty seal will void the warranty in any case.

The use of this unit is at your own risk!

All service needs to be handled by DynaSample or an authorized service center.

3) Limited Warranty:

DynaSample grants a 2 year warranty from the date of purchase for all parts and the software / library as long as the defect has not been caused by improper handling, mechanical damage or intentionally. For verification of the warranty it is necessary to present either the original sales invoice or having the unit registered with the serial number plus name and full address. A damaged or broken warranty seal will render the warranty void.

Copyright © 2018 DynaSample - All rights reserved.

Product features, specifications and availability are subject to change without notice.



FCC Compliance Statement (U.S.A.):

...



European Compliance Statement:

CE mark for European Harmonized Standards:

...



This symbol indicates that in EU countries, this product must be collected separately from other household waste, as defined in each region. Products bearing this symbol must not be discarded together with household waste.

Dieses Symbol bedeutet, dass dieses Produkt in EU-Ländern getrennt vom Hausmüll gesammelt werden muss gemäß den regionalen Bestimmungen. Mit diesem Symbol gekennzeichnete Produkte dürfen nicht zusammen mit dem Hausmüll entsorgt werden.

Akai Professional, EWI-USB, EWI4000s, Yamaha WX5, WX7, WX11, Softwind Synthophone and Casio DH-100 or other trademarks contained herein are the property of their respective owners.

Special thanks to „Cembalobau Merzdorf“ for their kind support!

II.) Design and Architecture of the XpressO

1) General Information about Sound Production

- Features

Two Voice Sample Engine & Virtual Analogue Synthesizer

The XpressO can play Samples and the integrated analogue synthesizer at the same time.

MIDI plus USB-MIDI Inputs

allow a flexible setup with several MIDI controllers.

TDB (True Dynamic Behavior)

True Dynamic Behavior describes the technique that the XpressO uses to emulate the behavior of real instruments. The XpressO uses manipulations that are very similar to the way the air column inside a tube of a real instrument is vibrating. This approach guarantees a vivid dynamic and natural sound spectrum. However – as opposed to physical modelling – samples are used as a sound base. This is why the instrument is not only behaving very “realistic” – it also sounds very “realistic”.

Voice Control

Voice Control allows extremely intuitive dynamic control by using a microphone.

The most natural way to achieve musical phrasings is the human voice. The XpressO captures these phrasings with a microphone and translates the information internally to MIDI data to control dynamics and sound. The captured data can control the internal sounds and also outputs CC messages for use with a sequencer as well.

A „Pitch to MIDI“ converter allows directly singing into an internal synthesizers. By using a neck contact microphone it is even possible to use acoustic instruments like a trumpet or a saxophone to operate the internal Voice Synthesizer or – with certain restrictions – sampled instruments.

Dynamic Vibrato

Many wind players create vibrato by changes of the air stream. This technique is usually called “diaphragm” or “throat” vibrato. The XpressO recognizes this type of vibrato and creates a musical sounding vibrato that does not cause any intonation artifacts.

Keysplit

The keysplit function allows keysplits and dual layers even if your MIDI controller does not provide such features.

Chord-Mapper

The XpressO's Chord-Mapper offers the unique possibility to execute polyphonic playing on a monophonic instrument like a MIDI windcontroller. To achieve this task chords with individual voices can be assigned to each single note. Depending on the mode you are using chords can be assigned over the full range or repeat every octave or they could use just one single chord that will be shifted parallel through the entire range.

Karaoke Audio Playback Engine

For each preset an audio file can be assigned that will start automatically after a certain amount of notes being played. This way there is no need for an external unit to provide backing tracks. No extra action – other than selecting the preset - is required to start the backing tracks.

Optimized for MIDI Wind Controllers

The XpressO is suited very well for the use with MIDI wind controllers. All necessary settings can be set automatically for each MIDI input and special preset banks have been optimized for the use with these instruments.

Akai EWI-USB Editor / Pitchbend Program Change

The XpressO can edit all parameters of the AKAI EWI-USB. Even though the EWI-USB has no program change buttons it is possible to receive MIDI program changes with the XpressO from the EWI-USB.

Complete MIDI Controller Redirecting

Unfortunately not all keyboards or windcontroller can send any CC message that is needed at the moment. This is why the XpressO offers the ability to globally redirect any incoming CC message, aftertouch or pitchbend into another CC message. In addition to this it is possible to define and store up to six individual remappings including range mapping per preset.

10 User Preset Banks

To store edited presets there are 10 [User] banks available each containing 128 presets. These banks can be archived via USB and / or exchanged with other users.

2) Setting up the Cable Connections

- Connect the MIDI out of your keyboard or other MIDI controller with the MIDI in jack on the left side of the **XpressO**. Alternatively you can also connect a USB keyboard or an Akai EWI-USB to one of the front USB connectors. The USB keyboard needs to work with standard USB MIDI drivers. Otherwise it is not possible for the XpressO to recognize this unit.
- Connect the Audio out jack with a proper cable using 1/4 inch unbalanced phone plugs to your amplifier or mixing desk. The nominal level is -10 dB. Alternatively you could use a suited RCA cable to connect the digital SPDIF output to a corresponding SPDIF input of your amplification system.

!!!

Attention (!): *The SPDIF output will have to be activated in [Utility] beforehand!*

- You can alternatively connect a pair of headphones to the 1/4 inch stereo jack at the front panel of the unit.
- Connect the included AC adapter with the jack on the rear side of the XpressO. Then connect the AC adapter to the wall socket and turn the unit on by moving the power switch on the right side of the unit to the upper position. The display will show a startup message.
- The **XpressO** is now loading the software and the samples. This can take some time. When loading has finished the display will say „READY“ and change to the main display page showing the preset names and numbers as well as some additional information.
- To switch the unit off move the power switch to the bottom position
It is recommended to always disconnect the AC adapter from the wall outlet if the unit is not in use.

3) General Operating Instructions

On the XpressO there are four function keys or soft keys as well as two data entry wheels on the left and the right side.

The four function keys are assigned as preset memory buttons while on the main display page. When in any of the edit modes these buttons serve to jump directly to the corresponding functions shown in the display. When pressed once more the value of most parameters can be toggled between the current value and the default value. Furthermore - in **[Edit]** mode by pressing and holding - these buttons can be used to copy single parameters to a range of other presets within a preset bank or to restore the respective parameters from the original factory presets.

☺ *Hint: By pressing one of the function keys while still on the title of the menu you can jump quickly to the parameters without having to wait any longer.*

With the wheel on the left hand side of the remote control unit you can move to the left [**◀**] or right [**▶**] to select different menu options. By pressing and turning you can move up [**▲**] or down [**▼**] and change the current value. You can also change values up [**▲**] or down [**▼**] with the right wheel which is the normal procedure.

The left wheel also has the function of the **[ESCAPE]**. Pressing and holding for more than 2 seconds triggers a RESET. This will cut off stuck notes and take you back to the main display page. It also resets some internal parameters that might be causing some unexpected behaviours.

The right wheel has the function of the **[OK]** or ENTER.

Like this the current action gets either confirmed or aborted.

On the main display page pressing the left wheel while turning up [**▲**] or down [**▼**] will select „external“ MIDI program changes internally. The preset name will be flashing and does not get selected until confirmation with **[OK]**. **[Escape]** will cancel the operation. The external MIDI program number can be seen on line 4 of the display on the left side.

The control dial on the right side will select the internal preset (without simulating an external MIDI program change). Pressing the dial shortly will assign this preset to the current external MIDI program number if a Preset Map has been activated in the **[Global]** menu.

4) Bank (Factory / User)

The **XpressO** ships with several **[Factory]** banks and 10 **[User]** banks (0-9) containing 128 presets (or patches) each. The **[Factory]** banks cannot be overwritten. However, the **[User]** banks can freely be changed in any way desired.

For each MIDI channel an individual Preset Bank can be assigned. Banks can be selected from MIDI with CC 0 (bank select).

A value of 0-9 has to be sent for the [User] banks. The [Factory] banks are starting at 64 – going up.

5) Preset

Each of the 128 available presets per bank can play a sample and / or a virtual analogue layer. On top of it you can assign an external preset from another MIDI sound module and – if desired – mix to the internal sound generator by connecting it to the line input of the XpressO.

To each preset you can assign a sound file (.wav, .aif, .mp3) and a Chord-Mapper preset.

Within each preset you can reassign a number of MIDI CCs for assigning the same controls of your instrument to different functions of the XpressO.

You will find more information about this in chapter VI.) **Edit Mode**.

6) Store Preset

Edited presets can be stored to [User] banks while in [Edit] mode by pressing [OK]. You can select a new preset number to store to - if needed - and confirm. The changed preset can then be recalled at any later time by selected the previously stored preset. To copy a preset to a new location from the main page move to the right until [Store] appears. Confirm with [OK] and proceed as explained above to crate a copy of the current preset on another location.

Edited presets can be renamed as explained in chapter VI.) **Edit Mode**.

Storing to the [Factory] banks is not possible.

7) User Interface

The user interface consists out of


- the **Main** page - this is where you select presets and see the most important information
- the **Play** pages - here you can assign sound files (.wav, .aif, .mp3) to the presets
- the **Edit** pages where sounds are edited and stored
- the **Global** pages where general settings for the entire instrument are made
- the **Utility** pages - where you can find additional tweaks and information about the **XpressO**

There are also functions for selecting **Preset Banks**, copying **Preset Banks** as well as the **Demo** page to hear some audio examples.

You can reach these pages by moving the left wheel clockwise [▶] or counter clockwise [◀]. Functions are activated with [OK] by shortly pressing [OK]. Pressing and holding the right wheel for longer than one second will send [ESCAPE] which will always take you back to the main page.

8) Alternative User Interfaces

There is also a possibility to use the “Key Remote” (see [Global] Key Remote) or a number pad of a USB QWERTY keyboard to get around the user interface. Note that the number pad has to be connected before starting up.

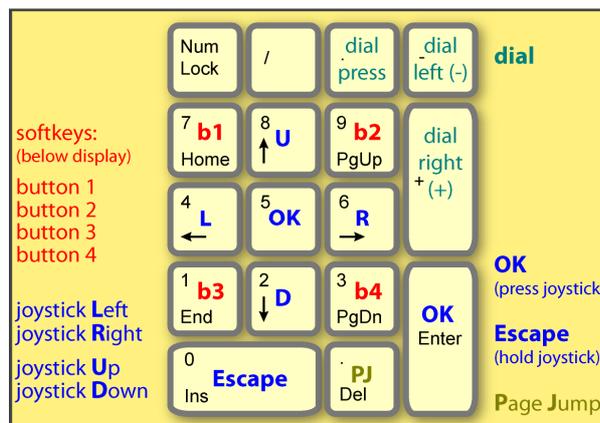

III.) Inputs and Outputs



- 1) MIDI In
- 2) Expression Pedal
- 3) Foot Switch 1 + 2
- 4) Stereo Line Out / Headphones
- 5) Mic In
- 6) 2x USB 3.0
- 7) Reset Button



- 8) Power Switch
- 9) Power Inlet (12V / 3A)
- 10) SPDIF Out
- 11) Monitor Outlet (HDMI & mini DisplayPort)
- 12) SSD Power Switch
- 13) MIDI Thru

IV.) Factory / User Preset Banks

1) Select Bank

Move to the left three times to go to the bank select page [**BnkNo**]. Press [**OK**]. Select the MIDI channel on the left part of the display and assign a preset bank to that channel on the right side with [**▲**] or [**▼**]. It is also possible to change all MIDI channels at once.

Move the cursor to the left [**◀**] or press one of the two function keys on the left side to select another MIDI channel and continue with other channels if desired.

Leave the bank select page with [**OK**] or [**Escape**].

☺ *Hint:* Shortcut is button 1 and 2. Escape by pression onto the dial.

2) Renaming of User Banks

By moving to the right while on the bank select page you can reach another page that allows you to rename this User Bank. Use the left wheel to navigate and the wheel on the right hand to change characters.

[**OK**] takes you back to the bank select page. [**Escape**] brings you back to the main page. All edits will be stored in any case.

3) Copy and Restore User Banks

[**User**] banks can be copied to other locations or be “reset” from the factory banks at any time.

- First select the target bank that you want to copy to or restore.
- Move to the left four times until you reach Bank Copy [**BkCp**] and press [**OK**].
- You will see a selection whether to make an internal reset or copy / restore to or from USB.
- Choose internal Reset.
- You will be warned that the current bank will be overwritten followed by: „ Press [**OK**] to continue“.
- Confirm with [**OK**].
- Use [**▲**] or [**▼**] to select the source bank to copy from.
- follow the directions on the displays or abort with [**Escape**].

☺ *Hint:* It's a good idea to make a safety copy of your own edited bank onto another bank!

4) Copy User Banks to an external USB Drive

This provides the possibility to store a complete preset bank onto an external USB drive. You can select both the source and target bank to copy from or to.

- connect a USB drive to one of the available USB ports.
- Make sure that a [**User**] bank is active.
- Move to the left until you reach Bank-Copy [**BkCp**]. Press [**OK**].
- You will see a selection whether to make an internal reset or copy / restore to or from USB.
- Choose “Backup to USB”.
- follow the onscreen instructions or abort with [**Escape**].

With the same method you can restore previously save preset banks to the XpressO when selecting “Copy from USB”.

☺ **IMPORTANT:**

- The USB drive has to be formatted with FAT32.
- These files can be copied to almost any computer for backup or email transfer.

V.) Play

1) General

The XpressO offers the possibility of automatic sound file playback by assigning an audio file to a preset on channel one. The backing track can be started automatically with the first note played after preset selection or any later note that has been assigned accordingly.

Start / Stop can also be received from MIDI realtime commands [250] and [252]. It can be selected as well from MIDI CC 120 that might have been assigned beforehand to a footswitch.

If a sound file is assigned to a preset and activated the name of it will be shown in the third line of the display together with the abbreviation of it's status.

You can reach the settings by moving to the right until **[Play]** appears and press **[OK]** to activate Playback Edit Mode.

!!! **IMPORTANT (!):** Playback can be stopped anytime with **[Escape]** !

2) Parameter

Karaoke Playback Selection - Select Sound File

Select a sound file with the dial to assign it to the current preset.

!!! **Attention (!):** Please reselect the sound file before editing and check the status or else there could be errors.

Volume

Sets the volume gain in dB.

This parameter will be stored with the sound file and be recalled when the file is used elsewhere.

Status

Decides whether the assigned sound file is active or not.

- **disabled** no sound file is played – the currently selected sound file will be reset
- **no autoplay** the sound file gets started only with MIDI start / stop commands
- **autoplay** plays the sound file when the note number that is set up in **[Start]** is reached
- **PgUp-Stop** plays the sound file then executes a program up command and stops
- **PgUp-Cont** plays the sound file then executes a program up command and continues to play the assigned sound file for this preset if activated

Start

Sets the note count to start playback of the assigned sound file if set to "autoplay".

Backing Tracks – internal or USB

It is possible to select whether the backing tracks are coming from the internal flash drive or from an external USB drive that can be connected to any available USB port.

After connecting an external drive you need to reselect "USB backing tracks"

- NO backing tracks** - turns the function completely off.
- INTernal backing tracks** - uses the soundfiles stored inside the internal flash memory.
- USB backing tracks** - plays the backing tracks that are stored on an external USB drive.

Karaoke EQ Settings

A two band equalizer for treble and bass can be activated to optimize the frequency response.

This parameter will be stored with the sound file and be recalled when the file is used elsewhere.

Copy Files from USB to the XpressO

With this function you can copy audio files of the formats MP3, WAV or AIF from an external USB drive into the XpressO's internal memory.

The files need to be located in the following folder:

xpression/karaoke/soundfiles/

The folder „xpression“ needs to be on the top level of the USB drive and not inside another folder.

!!!

IMPORTANT (!):

- Only MP3s with the format MP3 Layer III will work.
- NO blank spaces or special characters like Umlaut are allowed in the name.
Please replace all spaces with underscores “ _ “ before transferring.
- Similar names have to have a difference within the first 12 characters.

Follow the onscreen instructions!

Sound file Player Output

Selects the stereo output for the sound files.

!!!

Attention (!): *If the digital SPDIF-Out is activated all analogue stereo outputs carry the same signal.*

VI.) Edit Mode

1) General

Even though all presets are set up carefully to sound and behave as close as possible to the original instruments there might still arise the need to occasionally adjust the instruments according to your own taste, the musical requirements or your own individual playing style.

This can be done in **[Edit]** mode. This mode can be entered by moving to the right **[▶]** twice. Press **[OK]** to activate it.

Navigation is done with the left wheel **[◀]** (left) and **[▶]** (right) so all sub menus can be accessed. The **function keys** underneath the display allow activating the parameters directly.

The right wheel **[▲]** (up) or **[▼]** (down) changes the values.

Pressing a **function key** twice toggles between the current value and the default value.

Holding a **function key** for several seconds recalls a copy function that allows duplicating the current parameter and its current value to a range of other presets within this user bank. This also allows resetting the current parameter to the factory default value. During the upcoming dialog you can specify whether you want to copy or restore and set the starting and ending preset to where you want to copy / restore this parameter.

Edited presets can be stored to any user banks by pressing **[OK]** while in **[Edit]** mode. This way you can come up with several variations of the same sound that can be stored to individual preset locations.

You can leave **[Edit]** mode by pressing **[OK]** if you want to save your edits or by pressing **[Escape]** if you want to abort without saving the changed preset.

The XpressO uses virtual controller numbers from 128 to 134 internally for aftertouch (128), Pitchbend (129), microphone dynamic (130), normal internal dynamic (132), breath vibrato (133), bite or aftertouch vibrato (134) and individual pitchbend up / down (135 / 136).

2) Parameter

Select Edit Channel

selects the channel to be edited.

While on the main page the Edit Channel can be selected by pressing the dial on the right and holding it. Keep holding and select the desired channel.

Modwheel (CC1) Assignment

This assigns the function of the incoming MIDI controller 1 (CC1).

The range can be limited or expanded with "minimum" and "maximum". The range can even be expanded to twice the range that MIDI allows. In most cases this doesn't make any sense, though. Watch out for unexpected behavior when going over „127“.

When the modwheel is moved the XpressO will show the incoming value on the right side of the display.

The bottom line will show a description of the assigned MIDI controller. A * means that the XpressO is able to use this CC number.

The internal controller CC134 is used for direct vibrato with bite / lip control or aftertouch.

Aftertouch Assignment

assigns the function of incoming aftertouch including range.

Alternative Dynamic Controller

overwrites the standard dynamic controller that is assigned for his MIDI input.

Controller Reassign – Copy or Replace

Decide here if you want the original CC message to be replaced or copied after transforming.

MIDI Controller A – D Redirection

Here you can remap four midi controllers (before modulation and aftertouch assignment)

Source – sets the source controller.
Destination – sets the destination controller.
Minimum – sets the minimal value of the destination controller.
Maximum – sets the maximal value of the destination controller.

Sustain Pedal Assignment

Here you can assign a function to the sustain pedal (incoming MIDI CC64).

- **Sustain** corresponds to the normal hold pedal of a piano. The value is irrelevant.
- **Portamento** switches the portamento function on for as long as the pedal is pressed. A value between 0 – 127 sets the relative duration of the glissando between the notes. "0" is off - "127" equals the full value that is set up for the portamento time.
- **Mono Retrigger** repeats (only in monophonic mode) the same pitch even when playing different midi notes. Use it to repeat notes quickly or to simulate alternative fingerings on a wind instrument. The value is irrelevant.
- **Mono-Poly** switches the monophonic mode to polyphonic as long as sustain is pressed.
- **Mono-Poly+Sustain** allows polyphonic playing with sustain in a monophonic preset.

Vibrato (LFO)Settings

Amount – sets the stored LFO vibrato intensity.
Speed – is responsible for the speed of the vibrato.
Delay – makes the vibrato fade in within a certain amount of time.
Maximum – sets the maximal intensity of the vibrato.

Dynamic -> LFO Vibrato Amount and Vibrato -> Pitch

Lowers the LFO vibrato intensity at lower levels.

The value for Vibrato -> Pitch limits pitch modulation altogether. This is valid for both LFO and Bite/Aftertouch vibrato.

Dynamic Vibrato Settings (Breath and Bite / Lip-Vibrato)

With the Dynamic Vibrato you can be create vibrato by variations of the incoming dynamic controller. For wind instruments this is usually referred to throat or diaphragm vibrato. These are the available parameters:

Maximum – sets the maximal intensity.
Gain – boosts low values (similar to a compressor with auto gain).
Overtones – sets the influence of vibrato to the sound (only for dynamics – not lip/bite).
Volume Compensation – compensates the volume when using dynamics/breath to achieve more pitch and sound variations in relation to the level changes.

If Dynamic Vibrato is generally not used at all you could set this value to „0“ to save computation time.

Dynamic / Breath vibrato uses the internal CC133. Bite vibrato CC134.

Direct Vibrato Source

This parameter configures the direct vibrato source to be used. Choices are dynamics / breath or the internal MIDI controller 134 (bite / lip or aftertouch) or both. Using both might lead to undesired results in some cases.

Dynamic -> Sound Range

Minimal Dynamic

This limits the dynamic sound response on the bottom without affecting the volume range. The default value is 0. Increasing this value will result in changing the sound and attack behavior to correspond to a sound that is played at a higher volume.

The sound and feeling will become „harder“.

Maximal Dynamic

This limits the dynamic sound response on the top without affecting the volume range.

The default value is 127. Decreasing this value will result in changing the sound and attack behavior to correspond to a sound that is played at a lower volume.

The sound and feeling will become „softer“.

Mono - Poly Settings

polyphonic – allows polyphonic playing.

monophonic + polyphonic – allows monophonic legato playing while allowing polyphonic playing if several notes are pressed at the same time.

monophonic – is optimized for monophonic playing and allows the best legato playing as well as many special pitch “tricks” as shown in the Pitchbend tutorial.

☺ *Hint:*

Pressing the sustain pedal (MIDI CC 64) allows polyphonic playing even if a monophonic mode is activated.

Sample Filter Mix and Filter Resonance

Here you can adjust the mixing proportion between the filtered and unfiltered sound.

Minimal Dynamic Filter Mix

This sets the ratio between the filtered and unfiltered portion of the sound at minimal dynamic. “0” means 100% filtered sound while “127” is completely unfiltered.

Maximal Dynamic Filter Mix

This sets the ratio between the filtered and unfiltered portion of the sound at maximal dynamic.

Minimal Dynamic Filter Q

This parameter sets the amount of filter resonance at minimal dynamic.

Maximal Dynamic Filter Q

This sets the filter resonance at maximal dynamic.

Sample Filter Range Dynamic / Envelope Settings

Offset – sets the lowest filter frequency.

Dynamic – controls the impact of the dynamic controller to the filter frequency.

Envelope – regulates the range of the envelope to be applied to the filter frequency.

Retrigger – affects the envelope retriggering behavior when playing legato.

Sample Filter Envelope

This controls a standard synthesizer envelope for the filter cutoff of the sample engine.
(*The analogue synthesizer uses his own filter envelope*)

Attack – time to reach the peak level of the envelope

Decay – time to reach the sustain level

Sustain – level to hold the note until the note off is received

Release – time after the note off for the envelope to drop back to the initial level

Dynamic -> Volume Range

This can compensate the dynamic curve from -12 dB to +12 dB in case it has changed by editing certain sound parameters.

Brass Overtones

This adds overtones while playing *forte* (mainly for brass).

Overtone-Level – sets the volume.

Overtone-Tune – sets the frequency response.

Pitchbend to Volume & Overtones

Sets the influence of the pitchbend to volume and additional overtones.

- **uVol** - sets the volume change for pitchbend up
- **dVol** - sets the volume change for pitchbend down
- **uOvt** - sets the overtones gain on pitchbend up
- **dOvt** - sets the overtones gain on pitchbend down

Overdrive Settings

This is an overdrive / distortion module.

- **mix** - blends between the clean and distorted sound.
- **drive** - sets the drive of the distortion.
- **LpF** - this regulates the frequency of the lowpass filter of the distorted signal.
- **treble** - adds higher frequencies above the lowpass cutoff frequency.

Partial A + B Volume

With these parameters the levels of two individual overtones can be adjusted.

Partial A/B Number – selects the partial number of the overtone series.

Partial A/B Level – sets the volume of this overtone.

Doubling

This allows doubling of the instrument without the need of a second voice by introducing a small delay and pitch modulation while setting the pan position to hard left / right.

Doubling – activates the function.

Minimum – sets the minimal delay in milliseconds.

Range – defines the time window in which a random delay will take place.

Volume Settings

The volume controller (MIDI CC7) stores the basic level of the instrument.

How much attenuation CC7 actually provides be set up in **[Global]** „Control 7 volume range minimum“.

Volume-Trim can attenuate or amplify the volume of the preset from -48 to +12 dB. This is independent of the CC7 setting.

☺ *Hint: Use this to correct levels after editing or to set an instrument to solo or background level. You might want to copy the preset to two different locations for the latter.*

Velocity Limit

Sets a velocity limit for the minimum and maximum velocity.

- **vMin** - sets the lowest possible velocity. Values are scaled between vMin and vMax.
- **vMax** - sets the highest possible velocity. Values are scaled between vMin and vMax.
- **LegDamping** - lowers the velocity on legato playing (mainly for guitars).

Dynamic Range & dynamic Attack Time

Dynamic Range – sets the impact of the dynamic controller to volume between 0 and 100%.

Dynamic Attack – extends the attack time of the volume envelope at minimal level in ms.

Sample Starting Point

Gives you the option of cutting off the attack and starting the sample at the loop starting point.

Sample Volume Envelope ADSR

This takes care of the automatic level changes over time. Especially attack and release time with a standard synthesizer ADSR envelope for the samples.

(The analogue synthesizer uses its own volume envelope.)

Attack – attack time from 0 to the maximal level of the envelope in milliseconds

Decay – decay time in milliseconds until the sustain level is reached

Sustain – level that is being sustained until the note is released

Release – time of the fade out back to 0 after the note has been released

Legato Note Transitions

This sets the alternative attack and release times for legato transitions when the preset is set to a monophonic mode.

Legato-Attack – legato attack time in milliseconds

Legato Overlap Time – overlap time of the last note

Legato Pitch Time – portamento time for legato transitions

Legato Sample Start – starting point of new notes when played legato

Legato Portamento Time Key Follow

- **BpLO** - legato portamento time breakpoint lo - sets the lower key limit.
- **mult** - sets the multiplication factor of the lowest note (BpLO) of the portamento time.
- **BpHi** - legato portamento time breakpoint high - sets the upper key limit.
- **Mult** - sets the multiplication factor of the highest note (BpHi) of the portamento time.

Extra Attack Threshold

Here you can set the breakpoint between the low and high “extra attack envelope”.

Extra Attack Envelope

Allows setting an auxiliary envelope for the attacks separately for lower and higher dynamics.

- **vHi** - xtra attack level (upper dynamic range)
- **tmHi** - xtra attack time (upper dynamic)
- **vLo** - xtra attack level (lower dynamic)
- **tmLo** - xtra attack time (lower dynamic)

MIDI Octave Shift

Sets the default octave offset from -3 to +3.

This parameter can be changed in realtime with CC88 (octave minus), CC89 (octave normal) and CC90 (octave plus).

Mix Parameter Settings

Volume – sets the volume of the sample sound.

Panning – sets the stereo panning.

Transpose – transposes the instrument.

Variation – uses a sample offset which is not having an effect on all sounds.

Key Range

You can limit the note window. This is useful for creating keysplits.

Lo – sets the lower key limit.


Hi – sets the upper key limit.

TEST: shows the currently played note number for reference only.


Pitchbend Range Settings

Limits the pitch bend range up or down individually in steps of 10 cents.

- **down** pitchbend range down
- **up** pitchbend range up
- **crv** pitchbend curve. Negative values produce a smooth curve around the center while positive values produce a harder curve.

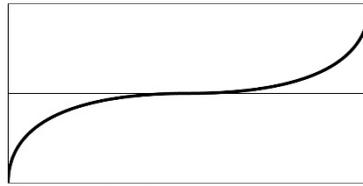


Smooth (-50)

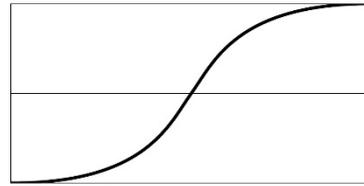


hard (50)

- **KfCrv** pitchbend range keyfollow curve. A negative value will cause the pitchbend range to expand faster while a positive value makes it expand slowly.

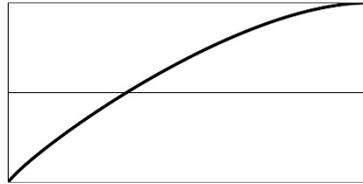

fast (-50)

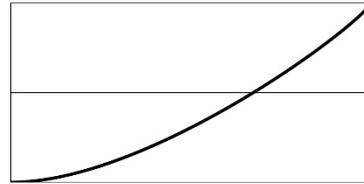

slow (50)

Pitchbend Range Keyfollow

Sets up the key window from the lowest to the highest note that gets affected by the pitchbend range compression or expansion. Notes outside this window use the lowest or highest value.

- **BpLO** - pitchbend range breakpoint lo (sets the lower limit)
- **mult** - sets the multiplication factor of the lowest note (BpLO) for the pitchbend range.
- **BpHI** - pitchbend range breakpoint high (sets the upper limit)
- **mult** - sets the multiplication factor of the highest note (BpHI) for the pitchbend range.

Scale Detune

This allows a microtonal detune of individual notes inside a scale. The scales themselves have to be edited in [Global] "Scale Detune Setup".

- Active** – activates the microtonal tunings.
- Bank** – selects a factory or user tuning.
- Preset** – selects one of the 128 presets available in each bank.
- Key** – sets the root of the scale.

External MIDI Instrument Activation

It is possible to control an external midi sound generator from the first MIDI out. Its audio output can be mixed to the XpressO's internal sound by feeding it into the line input without latency. Set up the XpressO here to use the internal, external or both sound sources.

External MIDI Instrument – Settings 1

The following parameters will be sent to the midi out when a program change is received:

- Program** – Patch selection. „NoPgm“ does not send any MIDI program change.
- Volume** – sends the volume as CC7 to the output. „Org“ does not send anything.
- Pan** – sends the panning as CC10. „Org“ does not send anything.
- Transpose** – shifts the note numbers of the outgoing MIDI notes.

External Instrument – Settings 2

- Dynamic Controller** – remaps the internal dynamic controller to CC2, 7, 11 or aftertouch.
- Channel** – sets the external MIDI channel.
- Lo** – limits the key window on the lower limit.
- Hi** – limits the key window on the upper limit.

Dynamic Type

sets the preset up for a velocity type instruments (like e.g. piano) or dynamic instruments (like a wind instrument).

Breath Noise Amount

adds breath noise for wind instruments.

Amount – sets the volume while sustaining the note.

Color – changes the frequency response of the noise.

Attack – sets the attack level for non legato playing.

Bend – sets the influence of Pitchbend to the noise level

Growl Settings

Gives a rough sound to instruments like saxophone normally caused by simultaneous singing.

Growl sets the level

Maximum scales the level as well as CC80 for external control.

On Dynamic determines whether the level follows the general dynamic.

Multiphonics Settings

Sets the maximal influence of CC81 to create multiphonics.

Minimum – defines the minimal level of the effect.

Maximum – limits the maximal effect level.

AutoMultiphonics – produces automatic multiphonics or „screams“ starting at a certain pitch up. This pitch depends on the parameter „**Fundamental**“.

Mode – decides if the lower part will be modulated with two (full) or only one (hi) note.

The upper range will always be modulated with two notes.

Harmonic Dirt Attack

This will create additional harmonics during the attack of the note. These are created in a random manner according to what would be possible or probable deviations of overtones above or below the current note position in relation to the instruments range. The volume can be set separately for legato and non legato.

Harmonic Dirt (Sustain) Settings

This will create additional harmonics during the sustained part of the note in a similar way than the “harmonic Dirt Attacks”. The range in which this will happen depends on the „**Fundamental**“ parameter.

- CC82 is the preset level of CC82 that modulates the effect in realtime.
- Max sets the maximal influence of CC82.
- Random Minimum sets a minimal random value.
- Random Maximum sets a maximal random value.

Instrument Fundamental Note

This defines the fundamental of a wind instrument. For woodwinds this is usually fingered low C. For Brass this is the lowest C (with no valves pressed) above the pedal note. Depending on the transposition this note will vary.

Fundamental – sets the fundamental of the instrument.

Type – defines whether it is a woodwind or brass instrument.

Effect Sends

Reverb – is the reverb send level.

Ambience – controls the ambience send level.

Chorus – sets the send level to the chorus.

Delay – defines the delay send level.

☺ *Hint:* The returns level and mute of these effect units can be globally edited in **[Global]**.

Random Pitch Detune

Random Detune causes slight variations in pitch that will let the instrument sound more naturally.

Attack – defines the maximal drift at the beginning of the note.

Fast – sets very fast pitch changes.

Slow – causes slow pitch variations.

Autotranspose Interval

At this place you can define an interval that is used for transposing the instrument if the function „Autotranspose“ in the [**Global**] menu is activated. This can be useful if reading original music of changing transposing / non transposing instruments without having to touch any other transposition setting.

Portamento Time

By sending the MIDI controller number 5 it is possible to achieve a Portamento or glissando effect between two notes. The shown value stands for the time in milliseconds. The addition “no Attack” cuts off the attack portion of the sample.

With increasing values of CC5 you can continuously increase the portamento duration from „0“ to the assigned maximal time.

When Pitchbend is outside the center position Portamento will be activated automatically.

☺ *Hint:* In [**Global**] you can define the width of this Pitchbend center.

Voice Synthesizer

The Voice Synthesizer can recognize pitch information from a connected microphone and translate it to internal MIDI information. This in return can trigger an internal monophonic synthesizer. Polyphonic audio signals cannot be analyzed.

Samples can be triggered as well but are – due to latency – limited in use.

Active – enables pitch recognition from the microphone and assigns it to the synth or the current sample preset.

Preset – selects a synthesizer preset.

Octave – determines the octave range.

Volume – sets the level of the synth.

Switch MIDI channels with CC66

CC66 can be used to switch between MIDI channel 1 and either Ch02 or Ch09 in various ways with or without holding the other channel's note(s). Switch all notes off by pressing CC66 twice.

- **not active**
- **switch to channel 2**
- **switch to channel 9**
- **switch to channel 2 and hold channel 1** - This allows building chords on channel 1 and switch to channel 2
- **switch to channel 9 and hold channel 1** - This allows building chords on channel 1 and switch to channel 9
- **switch to channel 9 and hold Chord-Mapper down** - This allows building multitimbral chords with the Chord-Mapper moving down channel by channel
- **switch to channel 9 and hold Chord-Mapper up3** - This allows building multitimbral 3 voice chords with the Chord-Mapper moving up channel by channel
- **switch to channel 9 and hold Chord-Mapper up4** - This allows building multitimbral 4 voice chords with the Chord-Mapper moving up channel by channel
- **switch to channel 9 and hold Chord-Mapper up5** - This allows building multitimbral 5 voice chords with the Chord-Mapper moving up channel by channel
- **switch to channel 9 and hold Chord-Mapper up6** - This allows building multitimbral 6 voice chords with the Chord-Mapper moving up channel by channel

4 Band Equalizer

This allows changing the volume of four predefined EQ bands in Steps of 1 dB.

Keysplit Activation

This creates monophonic or polyphonic keysplits or layers with two instruments. This function is available on channel 1 and 9 only. The second patch is located one channel above the first one. Respectively channel 2 or 10.

Split – activates this function.

Bank – sets the preset bank of the second instrument. Only the current user bank or the factory banks are available. Other user banks cannot be used to avoid errors when banks are moved.

Preset – selects the sound of the second instrument.

EDIT – gives access to more parameters as described below. Softkey 4 and [OK] to enter.

Keysplit A - Settings

A-Lo – sets the lower key limit for the first sound.

A-Hi – sets the upper key limit for the first sound.

Transpose – shifts the note numbers the first sound up or down.

Variation – recalls a sample variation. This can be useful to avoid phasing when doubling the same sound.

Keysplit B - Settings

This contains the same parameters as Keysplit A for the second (+1) midi channel.

Keysplit Volume and Panning

Volume A / Volume B – sets the volume for both instruments.

Pan A / Pan / B – sets the stereo position for both sounds.

Keysplit Detune and Pitchbend

Detune A / Detune B – sets a detune for both sounds.

Pitchbend A / Pitchbend / B – multiplies the originally programmed pitchbend range.

Keysplit Controller Handling

Here you can specify which incoming CC messages will be forwarded to the second channel.

Do not copy any CC – does not forward any controllers.

Copy selected CC -> B – copies only selected controllers.

Redirect all CC -> B – sends all controllers to the second channel and not to the first one.

Clone all CC -> A+B – copies all CC messages to both channels.

Keysplit Controller A – C Redirection

Source – sets a controller number to be forwarded.

Destination – sets the destination controller number for his message on the second channel.

Clone Channel – allows the controller to be used only on the second or on both channels.

Chord-Mapper Main Settings

This menu item activates the Chord-Mapper which allows polyphonic multitimbral playing with a monophonic MIDI instrument input.

With the Chord-Mapper it is possible to assign up to 6 notes on separate MIDI channels for each incoming note. These channels are located from the third to the eighth channel above the original input channel. This means channel 3-8 when using channel 1. Possible input channels are 1 and 9. This means Chord-Mapper triggers chords stored on the preset of channel 1 and sends them to channel 3-8. The original note on channel 1 does not sound.

The „external“ mode can forward up to six incoming notes on channel 1 to six different MIDI channels as long as they are played at the same time (*within 30 ms*).

☺ *Hint:*

With the Synthophone you can send harmonies like this on a single channel to save MIDI bandwidth.

Active – selects the available modes:

Full uses one of the internal 1280 full key range maps.

External splits incoming chords on channel 1 to different MIDI channels.

Single uses only the chord stored at note 60 (middle C) and transposes it parallel. By using offset you can use a different source note chord.

Octave repeats the chord recorded to note 60-71 in all octaves.

Rotate rotates between 2 to 12 different chords stored from note 60 (middle C) up.

Rotate Random rotates randomly between the same 2 to 12 different chords as above.

Bank - selects the [User] bank where the Chord-Mapper preset is located.

Preset – selects a preset. Press [OK] to actually load this preset.

Reset / Store / Edit – choose one of these functions and execute with [OK].

Reset erases all programmed notes (without storing the changed preset)

Store saves the active preset in the current state to disk. It is possible to select another destination preset before without pressing [OK]. You will be asked to enter a new name. Confirm with [OK].

Edit takes you to further options of Chord-Mapper.

Proceed as follows to enter a new map or to edit an existing one:

- Select the mode plus the preset number and bank.
- If desired reset the map to erase all existing notes.
- Make sure that voices have been activated beforehand.
(the easiest way for doing this is to start out with an already existing Multi Preset)
- Press a connected sustain switch (remote unit or MIDI) 3x quickly or press onto the dial on the right hand of the remote.

Now you will be asked to set the base note.

For “internal” this can be any note of the piano range between MIDI note 24 and 108. For “single” or “octave” you need to choose middle C (MIDI note 60).

The base note is the note that will hold and trigger the first chord that is recorded. All following chords will automatically get assigned to the next chromatic note up. This way you can recall the recorded chords one after each other by playing a chromatic scale up from the base note.

Now play the first chord by arpeggiating downwards to set the correct voice order and hold the notes if you are using a keyboard. When using a monophonic instrument you can press the sustain pedal until the chord is completed.

By releasing all notes or the sustain pedal the chord is stored to the base note. You will now be asked to enter the next chord. On the lower line of the display you can always see the target / trigger note to where the current chord will be stored.

When done entering all chords this way press sustain 3x quickly or press onto the dial of the remote. Note entry is finished and you will see “done” for a short moment.

In case that you have made a mistake you can stop and restart from there by entering this note as the new base note. This way you can also replace single chords if you have changed your mind about the voicings.

Chord-Mapper does not erase any chord that you don't overwrite explicitly.

Once you have exited record mode you can listen to your arrangement immediately by playing a chromatic scale from the base note up.

Please notice that the voices that are used have to be activated beforehand in order to hear anything.

If you are happy with your arrangement you can store the edited preset onto any preset number and (user) bank.

Please read the section “Store” above about this.

Rests can be entered with a „rest note“ which is defined in [Global] / **Chord-Mapper Pause**.

These rest notes can be used to enter e.g. only a trombone note in a section with trumpet, tenor sax and trombone. In this case you would play a rest note for the first two instruments (trp & ten sax) while holding sustain and then – without releasing sustain – play the trombone note.

With this method you can build complicated polyphonic arrangements.

Chord-Mapper Mix and Transpose Settings

Volume – sets the volume for all voices

Panning – sets the stereo pan position of the voices. There are optimized presets for different numbers of instruments in several variations like narrow (N) and wide (W). The variations 1 or two define whether the upper voices are in the center or more on the outside on the stereo panning

Offset – moves the base note from where the chords will be played

Transpose – transposes the chords to different keys

Chord-Mapper Vibrato and Random Settings

Since individual instruments usually play their own vibrato it is strongly recommended to use LFO vibrato with modulation (CC1).

Vibrato – LFO vibrato amount. „Org“ uses the value stored in the preset

Random Pitch – random detune to achieve a better „live“ feeling

Random Timing – adds random timing to the middle voices

Chord-Mapper Sound Editor 1

Voice – select voice number

Bank – preset bank of the selected voice

Preset – preset of the selected voice

Active – turns the voice on/off or sets it to SOLO

Chord-Mapper Sound-Editor 2

Voice – select voice number

Volume – volume of the selected voice

Variation – sample variation of the voice. This eliminates phasing problems when playing in unison with the same preset.

Active – turns the voice on/off or sets it to SOLO

Chord-Mapper Sound-Editor 3

Voice – select voice number

Pitchbend Down – Pitchbend DOWN range of the voice

Pitchbend Up – Pitchbend UP range of the voice

Active – turns the voice on/off or sets it to SOLO

Chord-Mapper Sound-Editor 4

Voice – select voice number

Octave – chooses a octave transposition for the voice

Active – turns the voice on/off or sets it to SOLO

Virtual Analogue Synthesizer Activation & Mix

The XpressO contains a complete virtual analogue synthesizer with two oscillators. This synth can be used simultaneously with the sample sounds.

!!!

Attention (!): *This is very demanding on the machine. In case of such dual sounds it is strongly recommended to reduce polyphony to six voices as described below.*

Select – samples or analogue synth or both.

Analogue Volume – volume of the analogue synth.

Sample Volume – volume of the sample engine.

Edit – takes you to further parameters after pressing [OK].

Preset Voice Limit

You can set a voice limit per preset to prevent overloading of the unit. The voice limit will be valid for the 8 channel voice block that you are playing and overwrite the global limit that is set up in [Utility].

Guitar Mode

This is still under development.

Edit Preset Name

Let's you change the name of the preset.

Navigate with left [◀] and right [▶]. Change the name with up [▲] or down [▼] or with the dial.

4) Store Edited Presets

Edited presets can be stored to [**User**] banks (while in [**Edit**] mode) by pressing [**OK**]. Storing to [**Factory**] banks is not possible.

The display will show “store preset?” Confirm with [**OK**].

Then you have the option to select a new preset number and bank with up [▲] or down [▼] or by using the control dial. Confirm twice with [**OK**]. The Preset is stored now!

With [**Escape**] you can abort the operation at any time.

- ☺ *Hint:* To reset a preset to the original state select the preset from the [**Factory**] bank. Then use [**Store**] to copy it back to the desired [**User**] bank.
You can copy an entire preset bank by using [**Bank Copy**] as described in chapter V.) 3.

5) Discard Changes of Edited Presets

If you are not happy with the edits that you made you can discard them by pressing [**Escape**]. All changes will be lost.

VII.) Store

Use store to copy an existing preset to another location.

Copy Presets

By moving three times to the right you will reach the menu entry [**Store**]. Press [**OK**] to copy the current preset to another location.

The display will show “store preset?” Confirm with [**OK**].

Then you have the option to select a new preset number and bank with up [**▲**] or down [**▼**] or by using the control dial. Confirm twice with [**OK**]. The Preset is stored now!

With [**Escape**] you can abort the operation at any time.

☺ *Hint:* You can copy an entire preset bank by using [**Bank Copy**] as described in chapter V.) 3.

VIII.) Global Settings

1) General

These are settings that affect the entire instrument and not the individual presets.

2) Enter Global Settings Mode

To change the [**Global**] settings move from the main page to the right until you reach [**Global**] and press [**OK**].

You can leave [**Global**] mode with [**OK**] or [**Escape**].

Other than in preset [**Edit**] mode all changes will be stored no matter if you leave this mode with [**OK**] or [**Escape**]. In certain cases you can leave this mode only with [**Escape**]. This is when [**OK**] is needed for parameter confirmation.

3) Parameter

Program Number Mapping

With these maps you can assign incoming MIDI program changes to the internal preset numbers. There are nine program maps available in total.

Channel – selects the channel to assign the program map to.

Program-Map – selects the map to be assigned to this channel.

[**Edit**] + [**OK**] – takes you to the editor to manually change assignments.

Editor: On the left side of the display you set the incoming MIDI program number. This can also be set by an incoming MIDI program change.

On the right side you can select the target preset with up [**▲**] or down [**▼**] or by using the control dial. Confirm with [**OK**]. Without pressing [**OK**] the assignment will not be stored.

The assignments can also be done on the main display page:

Choose a MIDI program number by sending an external program change or by selecting it with the left wheel while pressing and then pressing [**OK**]. The MIDI program number will be shown on the bottom left.

Now select a preset with the control dial on the right and press the dial.

The preset is now assigned to the last selected MIDI program number.

☺ *Hint: Make sure a program map is activated!*

Copy Program Map

Select the source and the destination program map and confirm twice with [**OK**].

Program Change Delay Time

This sets a delay time in milliseconds for an incoming MIDI program change to make sure that the bank change can be processed before the program change.

☺ *Hint: A higher value than "0" is only needed when sending bank changes (CC0) before a program change!*

Key-Remote Activation

When KeyRemote is enabled it is possible to control the front panel of the remote from MIDI notes. The LCD display can be seen on the monitor output so no remote is needed if desired.

Mode1: Pressing once allows storing and recalling the preset memories 1 - 8 starting on the base note. Short to recall long to store the current patch number. The lowest display line will show a "p" as the first character.

This mode will be automatically deactivated after storing or recalling a preset memory.

Mode2: Pressing twice will show a "d" for direct patch number entry as described **XI) Special Features**.

This mode will be automatically deactivated after storing or recalling a preset memory.


Mode3: Pressing three times enables the key remote. It is possible to enter a base note which corresponds to lo C on the graphics below.

The "Deactivate" key deactivates the key remote.

The parameter base note sets the note for "button1". Default is low C (MIDI note 36).

The two mode buttons (lo Bb and B) can be placed below or above the function keys by selecting "activation" "below" or "above". Default is "below".

In this case "Mode" would be hi Eb and "Deactivate" would correspond to hi D.

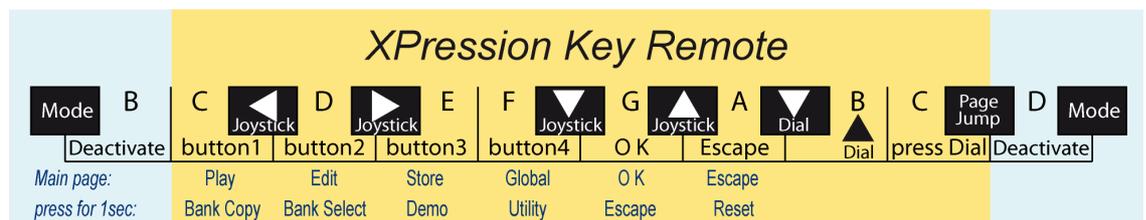

The Key Remote can be enabled to the default settings by playing these notes before any other notes after powering the unit up:

Middle C (60) - D - E - Db - Eb - F - G [Low C (36) - D - E - Db - Eb - F - G on older versions]

This can be useful if the remote is currently not available or the cable is missing.

Reverb

Reverb: controls the return level of the reverb.
Active: switches the reverb on or off.
Program: selects a reverb preset.

Ambience

Ambience: controls the return level of the ambience.
Active: switches the ambience on or off.
Program: selects a ambience preset.

Delay

Delay: controls the return level of the delay.
Active: switches the delay on or off.

MIDI Port Offset

Check if all MIDI inputs are working. Default offset is "0".

Doublecheck with the MIDI-Monitor in [Utility] to see the numbering.

(Ch1-16 = input 1, Ch17-32 = input 2, Ch33-48 = input 3 (USB), Ch49-64 = input 4 (USB))

MIDI Input Channel

You can assign an individual MIDI channel for each of the four MIDI inputs MIDI IN 1 / 2 und USB (= 3 / 4). „Original“ uses all 16 channels.

Copy CC65 -> CC05

Some instruments like the Synthophone or Casio DH-100 use CC65 for portamento instead of CC05. For these instruments you can copy CC65 to CC05 by activating this option.


Pitchbend Curve

Sets a curve for processing the incoming pitchbend data.

A negative curve (e.g. -50) will cause smaller pitch changes around the center.



A positive curve (e.g. 50) will cause more significant pitch changes around the center.

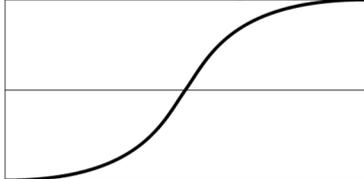

A value of "0" uses a linear curve and changes the pitch evenly over the full bend range.



Pitchbend -> Vibrato und Portamento Center Width

The XpressO can automatically create a portamento note transition if the pitchbend is not centered. At the same time it will switch off automatic LFO vibrato.

When using a reed style wind controller like the Synthophone or the Yamaha WX that is set to "Tight Lip" mode this can cause problems because it is quite difficult to keep the pitch centered perfectly at all times. Therefore it is possible to define how wide this zone is. A value between 16 and 32 should usually work. A value of 64 turns the function off completely.

This setting can be set separately for each input so different types of controllers can be used at the same time.

☺ *Hint:*

It is recommended to read the Pitchbend Tutorial to understand this function better.

MIDI Note Delay

Set a delay for the note on messages in milliseconds. This makes sense if the used controller does not send usable velocity messages. It only works if the parameter "Velocity or Dynamic Controller" in [Global] is set to "dynamic".

In this case the note has to be delayed by several milliseconds until the dynamic of the breath controller is at the full attack level. Then the dynamic value can replace the correct velocity.

The necessary delay time can be checked with the response of a percussive instrument like a piano or xylophone.

MIDI Note Off Delay

This parameter can delay note off notes only. This is a useful feature when recording with a windcontroller into a sequencer. In most cases phrases that were played legato will play back non legato because the sequencer reverses the note order. A setting of 4-5 ms should work.

In case notes are getting cut off this should be turned off again and manual editing is required.

Synthophone Note & Velocity Fix

If you play the Synthophone there is no velocity or usable dynamic information at the beginning of the note. This fix adds a small note delay to detect the correct dynamic information. To play velocity sensitive instruments like e.g. mallets "accurate" might be needed. Otherwise "fast" will be sufficient.

Percussive - Velocity or Dynamic Controller

uses the current dynamic level as velocity. For instruments that don't send usable velocity (like the Synthophone) this method can be used to achieve valuable velocity information. However, this works only in conjunction with "note delay".

MIDI Controller 4 (Pitchbend Down) reverse

reverses the values of an incoming MIDI CC4. This is useful if pitchbend down is controlled by an EWI with this MIDI controller. With a foot pedal you should leave it at the off position.

Edit Channel Selection on Main Page

When enabled you can select the current MIDI channel with the dial while pressing and holding it. This works only on the main display page.

MIDI Thru - Activation

Choose whether both MIDI inputs will always be sent to MIDI Out 1 (always on) or if the MIDI out is controlled by the parameters set up in the presets (use program settings) or if MIDI Thru is generally turned off (off).

„All Notes Off“ - Filter

Can be set up to ignore the MIDI „all notes off“ message, use it on individual channels or on all channels.

Retrigger Mode

This determines whether the note will keep playing or get cut off when the dynamics reaches a value of „0“. It can also retrigger the note when using a keyboard with a eXpressO pedal or breath controller.

- | | |
|----------------------|--|
| - no retrigger | normal mode – sustains the note without re-attacking. |
| - turn note off only | not used. |
| - full retrigger | keyboard breath controller mode – turns the note off and retriggers it when the dynamic reaches a value higher than „0“. |

MIDI-Input Transpose

Here you can transpose the incoming MIDI notes before any processing takes place.

Transpose Settings

Transpose

sets the global note transposition in semitones.

CC74 can also be used to set the current transposition. Connect a footswitch to send CC74. Press the footswitch and play the note you want to transpose to relative to middle C (MIDI note 60). Release the footswitch and the transposition is set. Repeat the procedure and set it to middle C to turn transposition off again. You can see the transposition interval in the display.

You can now press button 2 and 3 simultaneously to jump directly to the Transposition Settings. Set the transposition with the dial and press onto the dial to return to the main page.

Auto-Transpose

Auto Transpose causes transposing instruments like trumpet or saxophone to play in their original transposition (e.g. B^b or E^b).

☺ *Hint:*

This might be useful if you are playing with original transposed sheet music. The transposition of the instruments can be adjusted in the preset editor.

Chord-Mapper Key Offset

allows chord-maps that repeat in octaves to be played in other keys.

This sets offset and transposition globally at the same time. If the original map was recorded in the key of e.g. C a value of -2 will allow you to play it in the key of Bb.

This parameter can be set in realtime with CC 73. Press and hold a pedal assigned to CC 73 and play a note relative to middle C (MIDI note 60) to set the offset. The lower line of the display will show the interval. Release the pedal – set!

This key offset may cause unexpected behaviour if it is used with any other Chord-Mapper modes. Make sure it is set to “0” when using full or single mode.

Chord-Mapper Rest Note

Select a note number that can be used as a „rest“ while recording into the Chord-Mapper. This note plays normally any other time.

Scale Detune Setup (Micro Tuning)

It is possible to tune the notes of a scale differently than the standard well tempered scale. This might be useful to play “old” music or ethnic music that does not use the standard western equal temperament.

All tunings are relative to the key of C.

Preset - sets up one of the 128 User presets to store your own tunings.

Note - selects the note number that is to be retuned in semitones up relative to C.

Tune - changes the tuning of the selected note in steps of one cent.

Store - stores the currently selected scale with all edits.

Scale Detune – Force Always

Always uses the last selected active microtuning preset until a new one is active.

Program Change / Bank Change Activation Mode (for use with the Akai EWI-USB)

If you are using an instrument that is not capable of sending MIDI program changes (like e.g. the Akai EWI-USB) you can use a “trick” to send such program changes anyway. Please read section **XI.) Special Features** for a description on how to execute this function.

This option can be activated here.

Program Change Channel

Here you can enable sending program changes to all 16 channels.

This is very useful for controllers that use more than one single MIDI channel like the Xharp.

Dynamic Controller Input 1 - 4 Selection


Dynamic-Controller

This sets the MIDI controller CC message to be used for the dynamics.

Possible is: 2=Breath Controller, 7=Main Volume, 11=EXpressO, Aftertouch and Microphone.

Curve - changes from a linear to a logarithmical curve. 25 - 30 is recommended in most cases.

Curve Type - sets a single curve or a double curve that is centered in the middle and mirrored on both ends.




single-negative



single-positive



dual-negative



dual-positive

Dynamic Auto-Scale Activation

This function checks for the lowest and highest dynamic input and scales it to the full volume range of 0-127. This can be helpful for controllers that do not send the full dynamic range.

It can be set up separately for MIDI input 1 and input two.

Velocity Curve

Curve - changes from a linear to a logarithmical curve

Curve Type - sets a single curve or a double curve that is centered in the middle and mirrored on both ends.

Velocity Compression / Expansion

This lets you correct the velocity range of a connected keyboard to expand or compress its dynamic. This can be set up separately for all 16 MIDI channels.

Noise Attack – Level & Source (Breath Attacks)

With this setting you can globally adjust the level of the noise (breath) attacks in percent without having to edit them in the individual presets. The default value is 100%.

Ctl 7 Volume Minimum

This limits the effect that the MIDI volume controller 7 has to the range that is desired. Set it e.g. to 12 dB to fade between background level and solo level.

☺ *Hint:*

With the function „ignore stored volume“ the MIDI volume that was saved in the preset can be ignored so the current level of the pedal won't jump upon preset selections.

Ignore Stored Volume (MIDI-Controller 7)

Here you can set up whether the MIDI main volume (CC7) will be recalled from the value that was saved with the preset. This prevents the current position of a connected foot pedal to be overwritten by the preset settings.

!!!

Attention (!): *A wrong setting can cause volume problems if a connected foot pedal gets disconnected.*

Ignore Stored LFO Vibrato (MIDI-Controller 1)

With this parameter you can globally ignore the value that is stored for LFO modulation (CC1).

Reverse Sustain Pedal

This reverses the function of a connected sustain pedal (CC64) with a wrong polarity.

Eliminate Short Notes on Sustain

On wind controllers there is a good chance that some unwanted short notes are being held while the sustain pedal while building a chord. This function eliminates those “wrong” notes.

Set the minimum time for the wanted notes in milliseconds here.

MIDI Channel Stereo Output Assignment

assigns the stereo output for each MIDI channel.

!!!

Attention (!): *If the digital SPDIF output is activated in [Utility] only one stereo bus is available. All output busses will be mixed down to the first stereo output in this case.*

Language

sets the language to English or German.

Menu Title Time

This parameter affects how long the title of the edit screen will be seen before it jumps to the parameter display.

Display 1st Line Content

On this page you determine what the first display line is showing. By default this is the preset of the edit channel but it can also be set up to show the presets of a fixed channel number.

Display 2nd Line Content

On this page you determine whether the second display line is showing the current preset bank number, the current preset of the Edit channel or any other MIDI channel or the pitchbend of the edit channel.

Display 3rd Line Content

- "normal" shows the information about the current preset backing track
- "show dynamic" shows the current dynamics that you are playing (default)
- "show backing track" lets you select any backing track anytime from the main page without the need of having it programmed to the current preset beforehand.

Guitar Mode active

This sets up a special guitar mode that is currently still under development.

Expert Mode

This enables „expert mode“ which gives access to an extended set of options and parameters.

Machine Master Volume

Master Volume – sets the over all volume of the unit in steps of 1 dB.

Master Mute – mutes the entire instrument.

☺ *Hint:* This page can be reached directly from the main page by pressing button 1 + 4 below the display simultaneously. You can escape from this page also by simply pressing onto the dial on the right side of the remote unit. This will unmute the unit again.

Out1 Mono-Stereo Settings

This sets the first stereo output to stereo or mono if you do not have a stereo amplification system. All other outputs remain stereo.

☺ *Hint:* This can be used for mono monitoring while going stereo to a mixer or recording system as long as the outputs are set up to use only one stereo out in **[Utility]** "SPDIF Output On-Off".

IX.) Demo

Move twice to the left [◀] until DEMO appears and press [OK]. The demo songs will be played one after the other. You can navigate right [▶] and left [◀] to forward or rewind to the next or last song. [OK] or [Escape] stops the demo and takes you back to normal Play Mode.

X.) Utility

Utility contains a number of useful help functions and information tools.

Enter Utility: To enter [**Utility**] move the cursor from the main page to the left once until [**Utility**] appears and press [**OK**].

Exit Utility: Use [**Escape**] (= press and hold [**OK**] for 1 second).

Choose MIDI Controller

With this option you can carry out automatic setup of all global parameters for your MIDI controller. If you desire to make further adjustments or look at the parameters in detail you should activate Expert Mode in the [**Global**] menu.

Most of the settings are valid per MIDI input. However, some might overwrite settings of other inputs.

Mastertune

This sets the master tuning of the entire instrument in Hertz.

Save & Load <- -> USB All Global Settings

This lets you save and restore the entire folder with all [**Global**] and [**Utility**] settings to a USB drive. Follow the instructions on the display.

These files can be archived on a computer. It is possible to erase certain files from the folder for restoring only selected settings.

“Default” will restore all settings to factory default values. Reselect your MIDI controller after resetting.

Internal Backup – All Settings and Maps

Choose whether you want to make a backup or if you want to restore the current settings one of 5 user backup folders. Select the backup or restore number and press [**OK**]. Confirm with [**OK**] and all settings will be backed up or restored from any of the used folders.

As an option you can restore optimized default settings for the EWI, WX, Synthophone or MIDI guitar located in the backups 6-9.

Internal Backup of All Preset and Chord-Mapper Banks

Choose whether you want to make a backup or if you want to restore all user preset banks and maps to one of 5 user backup folders. Select the backup or restore number and press [**OK**]. Confirm with [**OK**] and all preset banks and maps will be backed up or restored from any of the used folders.

As an option you can restore factory banks located in the backups 6 to the user banks.

WARNING: All user banks will be overwritten by doing so!

Number of Voices

This sets the number of available voices for the first and second group of 8 MIDI channels. Be careful as it is possible to set up more voices than XpressO can handle without overloading its engine. Playing more than 8 voices will lead to problems. This setting should be set to the lowest count possible when playing with two controllers simultaneously. In certain cases – like when using the Chord-Mapper – it might be necessary to reduce the voice count within the presets to achieve a clean sound.

Latency Settings

Here you can set the latency that XpressO needs to play it's voices without any artifacts. It is strongly recommended to leave this setting at the recommended default setting of 6 milliseconds.

Line Input Level

XpressO provides a line input with standard RCA connectors that can be used as an alternative mic input. It can also serve to send audio data to the first stereo output without adding any additional latency e.g. to mix a second synth to the internal sound of XpressO. When this line input is not used it is recommended to turn the volume to „0“ to avoid unnecessary noise at the output.

The line input does not appear at the digital SPDIF output.

Search for HID Instrument

This is experimental – don't use it!

Remote Pedal 1 / 2 Settings

There are two stereo ¼ inch jacks at the remote unit for connecting foot pedals as well as another one for 2 footswitches and a connector for a breakout cable to connect 4 more footswitches. Take a look at chapter III.) **Inputs & Outputs**.

You can set up a MIDI channel and the controller number. The number in front of the MIDI channel refers to the MIDI input that the pedal is assigned to. In most cases the input assignment has no effect.

Pedal 1 Auto-Calibration

Leave it always on "auto". This is for testing only!

Foot Pedal Curve

This sets up the response of the foot pedals.

Curve - describes the logarithmical dynamic curve of the pedals

Curve Type - sets a single curve or a double curve that is centered in the middle and mirrored on both ends.

Footswitch 1 – 6 Settings

manages the MIDI channel and CC assignments of the six footswitches as well as the value range.

Transmit EWI-USB SysEx at Start Up & EWI-USB Reset

- no action sends no data to the EWI-USB at start up of XpressO
- send SysEx sends the currently stored parameters to the EWI-USB at start up

OK -> Reset initializes the EWI-USB either to the Akai factory settings or to the optimized settings for use with XpressO on pressing [OK].

EWI-USB Finger, Breath, Bite & Delay

EWI-USB Channel, Transpose & Pitchbend

EWI-USB Velocity, Breath2 & Bite2

EWI-USB Gain Settings

All of these parameters are responsible for the settings of the Akai EWI-USB windcontroller. Please check the relevant manual of the EWI-USB about the functions of these parameters.

Microphone Settings

- Lo Gain is the low threshold for the microphone to send data
- Hi Gain is the maximal value that is required for full level
- Curve describes the logarithmical dynamic curve of the mic signal
- Level shows the current value from 0 – 127

Microphone MIDI Channel

Sets the MIDI channel on which dynamic data of the microphone is being sent.

Microphone MIDI Output

Here you can determine whether the control values of the microphone will be sent to one of the two MIDI outputs.

Microphone or Line Input (for Voice Control)

This lets you choose the input which is used for Voice Control dynamics. The options are Microphone or Line In. For the microphone there are 3 gain levels available.

SPDIF Output On / Off

The digital SPDIF output needs to be activated to send audio signals. The SPDIF is activated only one stereo bus can be used instead of three. Only the first stereo bus is active but the other buses will be mixed together with the first one and distributed to all physical outs.

You can also select the number of available stereo buses here. If only one analogue stereo out is needed it is recommended to set it to SPDIF Off – 2 channels.

Global MIDI Controller Remapping

All incoming MIDI controllers, aftertouch and pitchbend can be mapped globally to other messages. In this place you can define whether you want to use one map for all channels or if you would like to remap data separately for all individual MIDI channels.

Global remapping is placed before the remapping that is available in the preset editor.

Set MIDI Control Remap

Here you can globally remap MIDI controller messages to other CC numbers.

- channel selects the MIDI channel (or all channels) to be edited
- active switches the remapping on or off
- source selects the source CC number
- destination selects the destination CC number

Copy Global Controller Map

Global controller maps can be copied between channels. By copying “reset” the map can be reset to the default values.

Press [OK] to execute.

CME WIDI-XU channel

Here you can select a channel for a CME WIDI-XU wireless MIDI receiver. EXPERIMENTAL!

MIDI - Monitor

Here you can monitor incoming MIDI data and foot pedals / footswitches.

This might be helpful to check the MIDI channel of your instrument. You can also see whether MIDI data is coming in at all or which Continuous Controller messages are received.

Use the dial to filter only certain data types like notes or CC messages.

Number of incoming MIDI Controller per Second

This shows the number of incoming MIDI Continuous Controller messages (including pitchbend) per second. Use this to check if your MIDI bus might be overloaded.

Authorization File – Save / Load

XpressO needs to be authorized to the hardware that you are using. After upgrading the operating system or restoring from a drive image that was not saved from the internal flash drive it is necessary to restore the authorisation file.

Here you can select whether you want to save or restore the authorisation for your unit. Press [OK] and follow the instructions on the display.

It is recommended to save the authorization file immediately and copy it to a safe place.

Complete Internal Drive Backup to USB (bootable)

It is possible to make a backup copy of the internal 16 GB flash drive that contains the operating system, the software and samples as well as all data that was stored by the user.

This might be useful if the internal drive is not functioning anymore due to e.g. a power failure during updating. In this case you can start from the external drive and restore the internal drive.

Make sure you have a rather fast external USB 2.0 flash drive with a capacity of 16 GB at hand. Do not use a drive with a reading speed of less than 15 MB/s. The drive will be erased! It should not be used for anything else after the backup.

The backup cannot be interrupted and takes up to one hour on a fast drive (possibly a lot longer with a slow drive!). Make sure you have enough time available before starting! Do not power the unit off during backup or restoring in any case!

Connect the drive to any of the USB ports on the front or rear side. Do not connect any other USB devices during backup or restore.

Press [OK] and follow the instructions on the display. When the backup is done you will see a "finished" message on the display. Turn the unit off to test starting up from the backup.

When starting from the external drive you need to turn off the power supply of the internal drive by moving the switch on the rear side of the unit to the lower position. The switch is located next to the power inlet of XpressO.

Start up from the external drive. Everything should work normally - only the start up time will be slower. If everything is working turn off the unit and remove the external drive. Put the switch back to the upper position. Start up again from the internal flash drive.

To restore the internal drive boot the system from the external drive (with the internal flash power supply turned off). Now set the flash power switch to the upper position to turn it on and repeat the same procedure as before when backing up to the external drive. The words "internal" and "external" will be reversed when restoring.

When done turn off the unit and remove the external drive. Restart from the internal drive.

You can make as many backup copies as you like. You can operate XpressO from the external drive the same way as if it was started from its internal flash memory.

It is strongly recommended to create a backup immediately and keep it in a safe place.

Serial Number & Software Version

Here you can check the serial number and the current software version.
Please provide these two numbers to DynaSample when experiencing technical problems.

Software Update

**BEFORE UPDATING CREATE A RELIABLE SYSTEM DRIVE BACKUP AS DESCRIBED ABOVE !
UPDATING WITHOUT BACKUP IS AT YOUR OWN RISK !**

This can update the software of XpressO. Please follow the onscreen directions.

Do not plug in the USB drive until asked to do so. XpressO automatically restarts in update mode and will ask you to connect the drive.

Please read the ReadMe file which is included in the update for exact directions.

!!! Do not turn off the unit in any case or unplug the power cord during the update procedure. This could permanently damage the internal flash drive!

Service – not permitted!

This page is only to be used by DynaSample or authorized technicians.

XI.) Special Features

Pitchbend Program Change with the Akai EWI-USB:

With the Akai EWI-USB it is normally not possible to send MIDI program changes. However, a special method by using a pitchbend / note combination makes this possible anyway with XpressO:

- Make sure you are on the main display mode and not in any edit mode.
- Do NOT blow into the breath controller respectively leave the eXpressO pedal at minimal position.
- Move the pitchbend to the highest position.
- Now move very fast from the maximal to the minimal pitchbend position and stay there.
- The display will ask you to enter a program number now.

The notes C - A of any octave correspond to the digits 0 – 9. To enter program number 019 you need to play the notes C, C# and A while holding pitchbend in the same position. The numbers 20 - 99 can be entered with two digits all others need three digits.

The notes A# and B have a special function of „Program Down“ and „Program Up“.

After entering all digits the program change will be executed and pitchbend can be returned to the normal position.

To abort simply set pitchbend back to the center position.

The same technique can be applied both on an EWI or a keyboard. Make sure that the dynamic controller is always at "0" while entering the program change

Bank Change with the Akai EWI-USB:

Bank changes can be accomplished in almost the same way:

- Proceed in exactly the same way but move the pitchbend from the lowest to the highest position.
- You will be asked to change the preset bank now.
- Notice that the notes C - A have no function here. Use only B und A# for plus / minus.

After entering the new bank number pitchbend must be returned to the normal position.

To abort simply set pitchbend back to the center position.

XII.) Trouble-Shooting

- **The unit does not start up**
 - When turning XpressO on you should see a startup message and after about 30 seconds the display should show the version number and then say "loading samples". If the latter is not the case the power supply of the internal flash drive on the rear might be turned off. Please check the switch next to the DC power inlet and make sure it is in the upper position.

- **No sound!**
 - Are all cables connected correctly?
 - Is the power LED lit up and does the display on the remote control unit show any messages?
 - Is the amp powered up?
 - Is the Master Volume set to 0dB?
 - Is XpressO still loading the operating system or sound library?
 - Play the demos to test the audio connections!
 - Use the [**Utility**] MIDI Monitor to check if any MIDI signals are coming in.
 - Is the dynamic controller at **XpressO** the same as the keyboard / windcontroller is sending?
 - Send a MIDI program change to select another preset!
Does the display reflect the program change?
If NOT, check the MIDI cables and MIDI channels!
 - Is the function "Ignore Stored Volume (MIDI-Controller 7)" in the Global menu activated?
Then turn it off, change the preset and try again.

- **I cannot play polyphonic on the keyboard**
 - The Preset is monophonic!
Set in [**Edit**] the Mode to „polyphonic“ or „monophonic + polyphonic“.
Alternatively for many presets you can press the sustain pedal (this function needs to be activated for the preset, though!).

- **Dynamics do not control volume or only volume without changes in timbre**
 - Make sure to set up the correct MIDI controller in the [**Global**] menu „Dynamic Controller In“ for the MIDI Input that you are using. All four MIDI Inputs can have an individual dynamic controller assignment.

- **The Akai EWI-USB is not starting up correctly (the green LED is not lit up)**

The EWI-USB can cause problems when starting up. In such a case try this:

 - Unplug the USB cable and reconnect it to XpressO during the startup screen.
 - Alternatively you could try to connect the EWI-USB via a powered USB hub. In some cases this improves the communication.

- **The Instrument plays in different keys**
 - Deactivate „Auto Transpose“ in the [**Global**] Transpose Settings.
 - Check the transposition in the [**Global**] Transpose Settings.

- **The instrument keeps playing wrong notes all of the time**
 - You should definitely practice more!

XIII.) MIDI Implementation

Function	Receive	Remarks
channel	1 - 16	
mode	3	multimode
note numbers	21 – 108	
velocity	yes	
channel aftertouch	yes	assignable
poly aftertouch	no	
pitchbend	yes	
control change	yes	
	00	bank select (MSB)
	01	modulation (assignable)
	02	breath control
	03	pitchbend up
	04	pitchbend down (foot control)
	05	portamento time
	06	data entry
	07	main volume / dynamic
	08	balance
	09	dimension2
	10	pan
	11	eXpressO
	32	bank select (LSB) [send only]
	39	volume (from VST instrument)
	63	edit page jump
	64	sustain, mono & portamento switch, retrigger
	65	portamento switch (optional)
	66	sostenuto
	71	chord-mapper volume voice 2-6
	72	chord-mapper voice count
	73	set chord-mapper key offset
	74	set transposition
	75	minimum dynamic range
	76	maximum dynamic range
	77	maximum vibrato
	78	vibrato speed
	79	vibrato delay
	80	growl
	81	multiphonics
	82	harmonic dirt
	84	transpose 1 semitone down
	85	transpose 1 semitone up
	86	program down
	87	program up
	88 – 90	octave (minus, center, plus)
	91	reverb send
	92	room send
	93	chorus send
	94	delay send
	95	
	96	data increment
	97	data decrement
	98	NRPN LSB
	99	NRPN MSB
	102 - 109	preset memory 1 – 8
	110 - 119	front panel keys
	121	start / stop
	123	all notes off
program change	1 – 128	
system exclusive	no	
system common	no	
system realtime	yes	start / stop
active sense	yes	

XIV.) Presets (factory bank 0 – XpressO LE)

(notice: these are the demo banks – presets might change after updates)

001	Flute1 Vibrato	065	Davy
002	Flute1	066	-
003	Jazzy Flute	067	-
004	Flute2 Ian A.	068	-
005	“Alto” Flute	069	-
006	Phonix Flute	070	-
007	Pan Pipes	071	-
008	Pan Pipes stereo	072	-
009	Octave-Flutes		
010	3 Flutes	073	-
011	Clarinet1 Bright	074	-
012	Clarinet2 dark	075	-
013	Bass Clarinet	076	-
014	Octave-Clarinets	077	-
015	-	078	-
016	-	079	-
017	Legit Tenor	080	-
018	Sax Kinda Mellow		
019	Ernie’s Tenor	081	-
020	Hard Tenor Sax	082	-
021	TenorSax Growl Stereo	083	-
		084	-
		085	-
022	Trumpet1		
023	Trumpet1 dark		
024	Trombone	086	-
025	Bass Trombone	087	-
026	Violin 1	088	-
027	Violin 5th	089	-
028	Strings 1	090	-
029	Strings 2 dark	091	-
030	Guitar Nylon	092	-
031	Nylon Strum C	093	-
032	Nylon Sitar	094	-
033	Bass Guitar	095	-
034	Floyd Rhodes	096	-
035	Vibraphone	097	-
036	Flute & Vibes	098	-
037	Steel Drums	099	-
038	Syn Trumpet	100	-
039	Syn Flugelhorn	101	-
040	Syn Soft Brass	102	-
041	Syn Brass-Lead	103	-
042	Lucky Man	104	-
043	Synth Bone	105	-
044	Square Pan Pipe	106	-
045	Spooky 1	107	-
		108	-
046	Trumpet + TenorSax + Trombone	109	-
047	2 Trumpes + 2 Trombones	110	-
048	Trumpet+Flute+Clarinet+Steeldrum	111	-
049	Trumpet + Tenor CC72	112	-
050	Trumpet+Tenor+Trombone CC72	113	-
051	Flute+Clarinet CC72	114	-
052	Synth Chords 1	115	-
053	Rotator Brecker 1	116	-
054	Rotator & Trombone ChanSwitch	117	-
055	Rock’n’Roll I	118	-
056	Rock’n’Roll IV	119	-
057	Rock’n’Roll V	120	-
058	Moonlight Serenade	121	-
059	Trains ChordMapper	122	-
060	All of Me (w-BackingTrack)	123	-
		124	-
061	MicIn-Trumpet	125	-
062	MicIn Sawtooth	126	-
063	MicIn Square	127	-
064	MicIn-Rotator	128	-

XIV.) Presets (factory bank 1)

(notice: these are the demo banks – presets might change after updates)

001	Flute1 Vibrato	065	Synth Chords 1
002	Flute1	066	Synth Chords 2
003	Flute2	067	Synth Chords 3
004	Flute2 Ian A.	068	Synth Chords external 1
005	Piccolo Flute	069	Synth Chords external 2
006	Pan Pipes	070	Synth Chords external 3
007	Phonix Flute	071	Brass Chords external
008	Oboe1	072	Sax Section external
009	English Horn		
010	Clarinet1 Bright	073	Moonlight Serenade
011	Bass Clarinet	074	In The Mood
012	Bassoon Bright	075	Sail Along part 1
013	Soprano Sax Clean	076	Sail Along part 2
014	Alto Sax Clean	077	Rock'n'Roll I
015	Alto Sanborn	078	Rock'n'Roll IV
016	Alto Desmond	079	Rock'n'Roll V
017	Sax Kinda Mellow	080	All Night long - Brass
018	Ernie's Tenor		
019	Tenor Sax Growl	081	Flute Badinerie (w- BackingTrack)
020	Dexter	082	Flute1 Mozart (w- BackingTrack)
021	Baritone Sax dirty	083	Oboe1 Vivaldi (w- BackingTrack)
		084	Bassoon Vivaldi (w- BackingTrack)
022	Trumpet1	085	Trumpet Haydn (w- BackingTrack)
023	Trumpet1 dark	086	All of Me (w- BackingTrack)
024	Trumpet1 Mute	087	Peter Gunn (w- BackingTrack)
025	Trumpet2 Mute	088	Take Five (w- BackingTrack)
026	Trumpet2 AutoWah	089	In a Sentimental Mood (w- BackingTrack)
027	Breathy Flugel	090	Trb - Night and Day (w- BackingTrack)
028	2 Flugelhorns	091	BigBand One4RS (w- BackingTrack)
029	Trombone	092	BigBand Trombone Section
030	Trombone Mute1	093	Bari Sax Dirty (w- BackingTrack)
031	Trombone Mute2		
032	Tenor Horn	094	Trumpet+Alto CC72
033	Tuba	095	Trumpet+AltoSax+Trombone CC72
034	French Horn1	096	Alto Sax – Mic-Growl
035	French Horn1 x2	097	12-String Strum (in C)
036	French Horn1 Mute	098	Tootsy
037	French Horn1 Mute x2	099	BluesHarp
038	Woodwind Quintet	100	A Horse With No Name – 12Str.
039	3 Flutes	101	Guitar Nylon
040	Saxophone Quartet	102	Guitar Steel
041	Saxophone Section (Big Band)	103	12 String Guitar
042	2 Trumpets + 2 Trombones	104	Mandolin
043	Brass Quintet 2	105	Grand Piano
044	French Horn + Trombone	106	Bright Piano
045	Trumpet + Ten Sax + Trombone	107	E-Piano 1
046	Tower of Power	108	E-Piano 2
047	Flute + Clarinet + TrbM + BsClar	109	Harpsichord
		110	Clavinet
048	Syn Trumpet	111	Celesta
049	Syn Flugelhorn	112	Glockenspiel
050	Syn Brass-Lead	113	Vibraphone
051	Syn Soft Brass	114	Marimba
052	Syn Horn	115	Xylophone
053	Synth Bone	116	Tubular Bells
054	Square Pan Pipe	117	Steel Drum
055	Arp Harp	118	Jazz Organ
056	Synth Bass 1	119	Pipe Organ 1
057	Synth Bass 2	120	Pipe Organ 2
058	Bass Guitar	121	Harp
059	Fretless Bass	122	Timpani
060	Double Bass	123	Gong
		124	MicIn-Rotator
061	Strings 1	125	Trains ChordMapper
062	Strings 2	126	Rotator&Trombone ChanSwitch
063	Violin 1	127	Hold&Alto ChanSwitch
064	Cello	128	Microphone -> MIDI OUT 1

Presets (factory bank 2 and 3)

001	Flute1 Vibrato	065	Trumpet 1
002	Flute1	066	Trumpet 1 dark
003	Flute2	067	Trumpet 2
004	Flute2 Ian A	068	Trumpet 2 dark
005	Piccolo - Flute	069	Trumpet 1 mute
006	Jazzy Flute	070	Trumpet 2 mute
007	Pan Pipes	071	Trp2 Mute AutoWah
008	Pan Pipes stereo	072	-
009	Alto Flute	073	-
010	-	074	-
011	-	075	-
012	-	076	Piccolo Trumpet
013	-	077	Flugelhorn
014	-	078	Breathy Flugel
015	-	079	2 Flugelhorns
016	Phonix Flute	080	-
017	Oboe1	081	Trombone
018	Oboe1 dark	082	Trombone Mute1
019	Oboe2	083	Trombone Mute2
020	-	084	Bass Trombone
021	English Horn	085	Tenor Horn
022	-	086	-
023	Clarinet1 bright	087	Tuba
024	Clarinet1 clean	088	-
025	Clarinet2 bright	089	French Horn1
026	Clarinet2 dark	090	French Horn1 x2
027	-	091	French Horn2
028	-	092	French Horn2 x2
029	Bass Clarinet	093	French Horn1 Mute
030	-	094	French Horn1 Mute x2
031	Bassoon bright	095	French Horn2 Mute
032	Bassoon dark	096	French Horn2 Mute x2
033	-	097	-
034	-	098	Tootsy
035	-	099	BluesHarp
036	-	100	-
037	-	101	Woodwind Quintet
038	-	102	4 Flutes
039	-	103	Flute + Oboe + Bassoon
040	-	104	2 Oboes + English Horn
041	Soprano Sax clean	105	2 Clarinets + Bass Clarinet
042	Soprano Sax dirty	106	Bass Clarinet + Bassoon
043	Groove-Soprano	107	-
044	-	108	-
045	Alto Sax clean	109	Saxophone Quartet
046	Alto Sax Sanborn	110	Saxophone Section (Big Band)
047	Alto Sax Desmond	111	Clarinet + Saxophone Section
048	-	112	2 Trumpets + 2 Trombones
049	Alto Glazunov	113	Brass Quintet 1
050	-	114	Brass Quintet 2
051	Sax Kinda Mellow	115	French Horn + Trombone
052	Sax Kinda Mellow dirty	116	Brass 1
053	TenSax1 'RoundMidnight (BiteVib)	117	Flugelhorn + Tenor Horn
054	Hard Tenor Sax	118	Tenor Horn + Tuba
055	Tenor Sax Growl	119	Trumpet + Ten Sax + Trombone
056	Ernie's Tenor	120	Trumpet + Ten Sax + Trombone
057	Dexter	121	Trumpet + 3 Saxes + Trombone 1
058	It Getz Airy	122	Tower of Power
059	-	123	Flute + Trp Mute + 2 Saxes + Trb
060	Legit Tenor	124	Flute + Clarinet + Trb + BsClar
061	Baritone Sax	125	TrpMute+EnglHorn+TrbMute+Bassoon
062	Baritone Sax dirty	126	-
063	-	127	-
064	BassBeast - Bari	128	Microphone -> MIDI OUT 1

Presets (factory bank 4 and 5)

001	Grand Piano	065	-
002	Bright Piano	066	-
003	-	067	-
004	Chorus Piano	068	-
005	E-Piano 1	069	-
006	E-Piano 2	070	-
007	Harpsichord	071	-
008	Clavinet	072	-
009	Celesta	073	-
010	Glockenspiel	074	-
011	-	075	-
012	Vibraphone	076	-
013	Marimba	077	-
014	Xylophone	078	-
015	Tubular Bells	079	-
016	-	080	-
017	Jazz Organ	081	-
018	-	082	-
019	-	083	-
020	Pipe Organ 1	084	-
021	Pipe Organ 2	085	-
022	-	086	-
023	-	087	-
024	-	088	-
		089	-
025	Guitar Nylon	090	-
026	Guitar Steel	091	-
027	Jazz Guitar	092	-
028	12 String Guitar	093	-
029	Mandolin	094	-
030	-	095	-
031	-	096	-
032	-	097	-
033	Double Bass	098	-
034	-	099	-
035	Bass Guitar (picked)	100	-
036	Fretless Bass		
037	-	101	-
038	-	102	-
039	Synth Bass 1	103	-
040	Synth Bass 2	104	-
		105	-
041	Violin1	106	-
042	Violin2	107	-
043	Viola	108	-
044	Cello	109	-
045	Double Bass	110	-
046	Str-Pizzicato	111	-
047	Harp	112	-
048	Timpani	113	-
049	Strings 1	114	-
050	Strings 2	115	Steel Drum
051	Syn Strings 1	116	-
052	Syn Strings 2	117	-
053	-	118	-
054	-	119	-
055	-	120	-
056	-	121	-
057	Violin 1 Pizzicato	122	-
058	Violin 2 Pizzicato	123	-
059	Viola Pizzicato	124	-
060	Cello Pizzicato	125	Gong
061	-	126	Wind Chimes
062	-	127	-
063	-		
064	-	128	-

Presets (factory bank 6 and 7)

001	Syn Trumpet	065	Synth Bass 1
002	Syn Flugelhorn	066	Synth Bass 2
003	Syn Brass Lead	067	-
004	Syn Soft Brass	068	-
005	Syn Horn	069	-
006	Synth Bone	070	-
007	Square Pan Pipe	071	-
008	Arp Harp	072	-
009	Spooky 1	073	-
010	Spooky 2	074	-
011	Flooty Synth	075	-
012	Popcorn Pizza	076	-
013	Analog Guitar	077	-
014	Synth Sitar (use sustain)	078	-
015	Sentimental	079	-
016	Lucky Man	080	-
017	Syn-Strings 1	081	-
018	-	082	-
019	-	083	-
020	-	084	-
021	Syn Soft Brass	085	-
022	Soft Brass Pad	086	-
023	-	087	-
024	-	088	-
		089	-
025	-	090	-
026	-	091	-
027	-	092	-
028	-	093	-
029	-	094	-
030	-	095	-
031	-	096	-
032	-	097	-
033	Synth Bass 1	098	-
034	Synth Bass 2	099	-
035	-	100	-
036	-		
037	-	101	-
038	-	102	-
039	-	103	-
040	-	104	-
		105	-
041	-	106	-
042	-	107	-
043	-	108	-
044	-	109	-
045	-	110	-
046	-	111	-
047	-	112	-
048	-	113	-
049	-	114	-
050	-	115	-
051	-	116	-
052	-	117	-
053	-	118	-
054	-	119	-
055	-	120	-
056	-	121	-
057	-	122	-
058	-	123	-
059	-	124	-
060	-	125	-
061	-	126	-
062	-	127	-
063	-		
064	-	128	-